


Drop Forged Wire Rope Clamps

Click Here To Buy

Hot galvanized, according to Federal Specification
FF-C450D, Type 1, Class 1.

Size (in.)	Min. Number of Clips Required	Amount of Wire Rope to Turn Back (in.)	Torque in lbs. ft*	Approx. Weight Each (lbs.)
1/8	2	3-1/4	4.5	.05
3/16	2	3-3/4	7.5	.10
1/4	2	4-3/4	15	.18
5/16	2	5-1/4	30	.31
3/8	2	6-1/2	45	.46
7/16	3	7	65	.73
1/2	3	11-1/2	65	.73
9/16	3	12	95	.96
5/8	3	12	95	1.00
3/4	4	18	130	1.50
7/8	4	19	225	2.44
1	5	26	225	2.7
1-1/8	6	34	225	3.1
1-1/4	7	44	360	4.6
1-3/8	7	44	360	5.2
1-1/2	8	54	360	5.9
1-3/4	8	61	590	9.8
2	8	72	750	13.75
2-1/4	8	73	750	15.7
2-1/2	9	84	750	17.9
2-3/4	10	100	750	22.0
3	10	106	1200	32.0

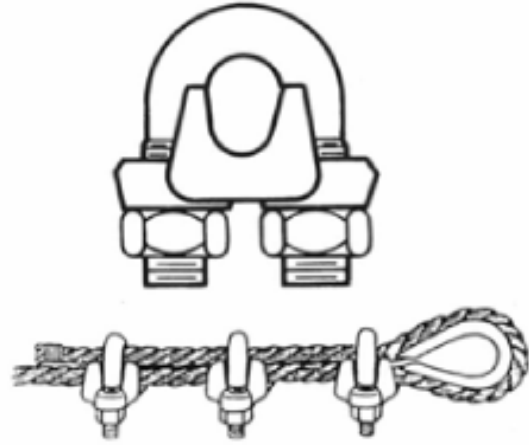

RIGHT WAY FOR MAXIMUM ROPE STRENGTH

Stainless Steel Clamps

Type 304 or 316. Dropped Forged

Size (in.)	Min. Number of Clips Required	Amount of Wire Rope to Turn Back (in.)	Torque in lbs. ft*	Approx. Weight Each (lbs.)
1/8	2	3-1/4	4.5	.05
3/16	2	3-3/4	7.5	.106
1/4	2	4-3/4	15	.18
5/16	2	5-1/4	30	.30
3/8	2	6-1/2	45	.46
1/2	3	11-1/2	65	.68
5/8	3	12	95	1.0
3/4	4	18	130	1.5
7/8	4	19	225	2.4
1	5	26	225	2.69