
Turnbuckles

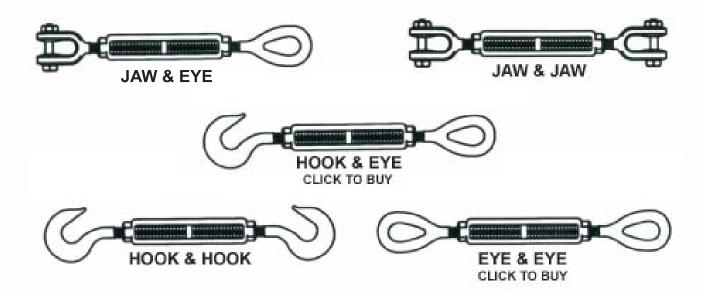

According to Federal Specification FF-T-791b. Hot galvanized, drop forged.

Size (Diameter x Take-Up) (In.)	Approx. Weight (lbs.)			Working Load Limit (Ibs.)		Average Overall
	Eyes and/or Hooks	Jaw & Eye	Jaw & Jaw	Hook & Hook Hook & Eye	Eye & Eye Jaw & Eye Jaw & Jaw	Length with Ends in closed Position (lbs.)
1/4 x 4	.3	.3	.4	400	500	8.25
5/16 x 4-1/2	.5	.53	.58	700	800	9.56
3/8 x 6	.75	.82	.93	1,000	1,200	11.88
1/2 x 6	1.50	1.62	1.68	1,500	2,200	13.31
1/2 x 9	1.75	1.82	1.85	1,500	2,200	16.31
1/2 x 12	2,18	2.19	2.20	1,500	2,200	19.31
5/8 x 6	2.63	2.69	2.82	2,250	3,500	15.50
5/8 x 9	3.00	3.01	3.25	2,250	3,500	18.50
5/8 x 12	3.25	3.50	3.75	2,250	3,500	21.50
3/4 x 6	3.75	4.25	4.68	3,000	5,200	17.00
3/4 x 9	4.50	5.00	5.38	3,000	5,200	20.00
3/4 x 12	5.75	5.75	6.12	3,000	5,200	23.00
3/4 x 18	7.00	7.25	7.75	3,000	5,200	29.00
7/8 x 12	8.38	8.88	9.38	4,000	7,200	24.63
7/8 x 18	10.25	10.60	11.44	4,000	7,200	30.63
1 x 6	10.75	11.10	11.80	5,000	10,000	20,63
1 x 12	11.25	12	12.88	5,000	10,000	26.63
1 x 18	14	14.75	16.1	5,000	10,000	32.63
1 x 24	17	17.75	18.6	5,000	10,000	38.63
1-1/4 x 12	19	21.2	23.6	5,000	15,200	29.88
1-1/4 x 18	24.1	26	26.6	5,000	15,200	35.88
1-1-4 x 24	25	28.7	31.2	5,000	15,200	41.88
1-1/2 x 12	27	31.1	35.5	7,500	21,400	32.38
1-1/2 x 18	31.2	36.4	40.7	7,500	21,400	38.38
1-1/2 x 24	38.2	44.2	47.6	7,500	21,400	44.38
1-3/4 x 18	53	57.5	62		28,000	41.38
1-3/4 x 24	58	60	64		28,000	47.75
2 x 24	90	102	115		37,000	51.75
2-1/2 x 24	163	180	200		60,000	58.50
2-3/4 x 24	180	214	248		75,000	61.50

Hooks not supplied on sizes larger than 1-1/2" diam.

Jaw ends up to 5/8": Fitted with bolt and nut. Jaw ends 3/4" & up: Fitted with pin and cotter.