


# Regular Nut Eye Bolts

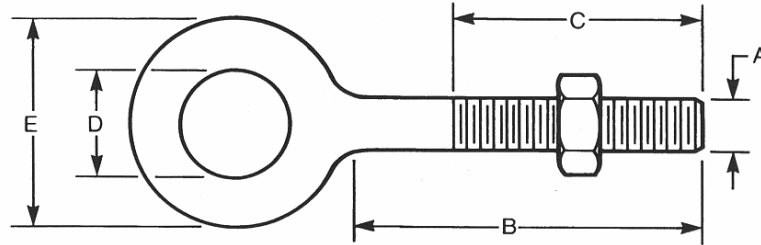


Forged carbon steel, hot galvanized, heavy hex nut.

| Size<br>Diameter x Shank<br>A B<br>(in.) | Working Load<br>Limit (lbs.)* | Approx. Weight<br>each (lbs.) | Dimensions (in.) |      |      |
|------------------------------------------|-------------------------------|-------------------------------|------------------|------|------|
|                                          |                               |                               | C                | D    | E    |
| 1/4 x 2                                  | 500                           | .06                           | 1.50             | .50  | 1.00 |
| 1/4 x 4                                  | 500                           | .10                           | 2.50             | .50  | 1.00 |
| 5/16 x 2-1/4                             | 800                           | .125                          | 1.50             | .63  | 1.25 |
| 5/16 x 4-1/4                             | 800                           | .17                           | 2.50             | .63  | 1.25 |
| 3/8 x 2-1/2                              | 1,200                         | .22                           | 1.50             | .75  | 1.50 |
| 3/8 x 4-1/2                              | 1,200                         | .28                           | 2.50             | .75  | 1.50 |
| 3/8 x 6                                  | 1,200                         | .33                           | 2.50             | .75  | 1.50 |
| 1/2 x 2                                  | 2,200                         | .46                           | 1.50             | 1.00 | 2.00 |
| 1/2 x 3-1/4                              | 2,200                         | .54                           | 1.50             | 1.00 | 2.00 |
| 1/2 x 6                                  | 2,200                         | .68                           | 3.00             | 1.00 | 2.00 |
| 1/2 x 8                                  | 2,200                         | .80                           | 3.00             | 1.00 | 2.00 |
| 1/2 x 10                                 | 2,200                         | .93                           | 3.00             | 1.00 | 2.00 |
| 5/8 x 4                                  | 3,500                         | 1.00                          | 2.00             | 1.25 | 2.50 |
| 5/8 x 6                                  | 3,500                         | 1.14                          | 3.00             | 1.25 | 2.50 |
| 5/8 x 8                                  | 3,500                         | 1.38                          | 3.00             | 1.25 | 2.50 |
| 5/8 10                                   | 3,500                         | 1.55                          | 3.00             | 1.25 | 2.50 |
| 5/8 x 12                                 | 3,500                         | 1.69                          | 4.00             | 1.25 | 2.50 |
| 3/4 x 4-1/2                              | 5,200                         | 1.64                          | 2.00             | 1.50 | 3.00 |
| 3/4 x 6                                  | 5,200                         | 1.81                          | 3.00             | 1.50 | 3.00 |
| 3/4 x 8                                  | 5,200                         | 2.0                           | 3.00             | 1.50 | 3.00 |
| 3/4 x 10                                 | 5,200                         | 2.3                           | 3.00             | 1.50 | 3.00 |
| 3/4 x 12                                 | 5,200                         | 2.5                           | 4.00             | 1.50 | 3.00 |
| 3/4 x 15                                 | 5,200                         | 2.9                           | 5.00             | 1.50 | 3.00 |
| 1 x 6                                    | 10,000                        | 3.6                           | 3.00             | 2.00 | 4.00 |
| 1 x 9                                    | 10,000                        | 4.3                           | 4.00             | 2.00 | 4.00 |
| 1 x 12                                   | 10,000                        | 5.0                           | 4.00             | 2.00 | 4.00 |

\*Regular nut eye bolts are designed for straight line pull applications only.  
Never apply load at an angle.


# Shoulder Nut Eye Bolts

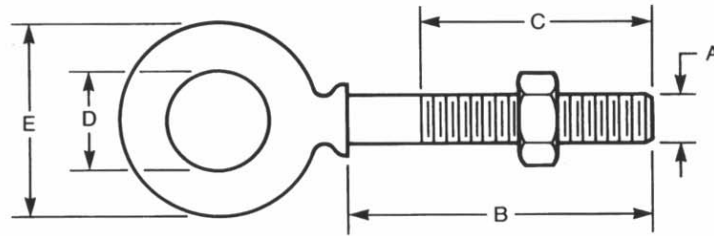

Forged carbon steel, hot galvanized, heavy hex nut.

| Size<br>Diameter x Shank<br>A B<br>(in.) | Working Load<br>Limit (lbs.)* | Approx. Weight<br>each (lbs.) | Dimensions (in.) |      |      |
|------------------------------------------|-------------------------------|-------------------------------|------------------|------|------|
|                                          |                               |                               | C                | D    | E    |
| 1/4 x 2                                  | 500                           | .06                           | 1.50             | .50  | .88  |
| 1/4 x 4                                  | 500                           | .09                           | 2.50             | .50  | .88  |
| 5/16 x 2-1/4                             | 800                           | .11                           | 1.50             | .63  | 1.13 |
| 5/16 x 4-1/4                             | 800                           | .15                           | 2.50             | .63  | 1.13 |
| 3/8 x 2-1/2                              | 1,200                         | .19                           | 1.50             | .75  | 1.38 |
| 3/8 x 4-1/2                              | 1,200                         | .25                           | 2.50             | .75  | 1.38 |
| 1/2 x 3-1/4                              | 2,200                         | .41                           | 1.50             | 1.00 | 1.75 |
| 1/2 x 6                                  | 2,200                         | .59                           | 3.00             | 1.00 | 1.75 |
| 5/8 x 4                                  | 3,500                         | .83                           | 2.00             | 1.25 | 2.25 |
| 5/8 x 6                                  | 3,500                         | 1.0                           | 3.00             | 1.25 | 2.25 |
| 3/4 x 4-1/2                              | 5,200                         | 1.5                           | 2.00             | 1.50 | 2.75 |
| 3/4 x 6                                  | 5,200                         | 1.7                           | 3.00             | 1.50 | 2.75 |

# Stainless Shoulder Nut Eye Bolts, Type 316

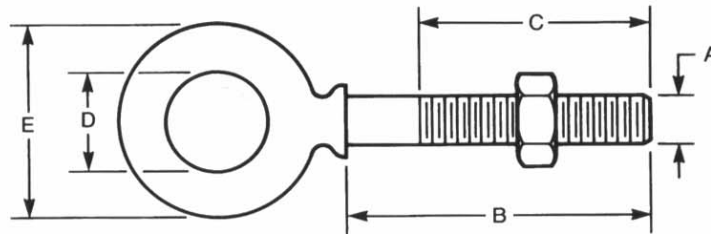

Forged, type 316 stainless, heavy hex nut.

| Size<br>Diameter x Shank<br>A B<br>(in.) | Working Load<br>Limit (lbs.)* | Approx. Weight<br>each (lbs.) | Standard<br>Package | Dimensions (lbs.) |      |      |
|------------------------------------------|-------------------------------|-------------------------------|---------------------|-------------------|------|------|
|                                          |                               |                               |                     | C                 | D    | E    |
| 1/4 x 2                                  | 460                           | .08                           | 50                  | 1.50              | .50  | .88  |
| 1/4 x 4                                  | 460                           | .10                           | 50                  | 2.50              | .50  | .88  |
| 5/16 x 2-1/4                             | 780                           | .11                           | 50                  | 1.50              | .63  | 1.13 |
| 5/16 x 4-1/4                             | 780                           | .14                           | 50                  | 2.50              | .63  | 1.13 |
| 3/8 x 2-1/2                              | 1,160                         | .19                           | 50                  | 1.50              | .75  | 1.38 |
| 3/8 x 4-1/2                              | 1,160                         | .24                           | 50                  | 2.50              | .75  | 1.38 |
| 1/2 x 3-1/4                              | 2,150                         | .42                           | 50                  | 1.50              | 1.00 | 1.75 |
| 1/2 x 6                                  | 2,150                         | .56                           | 50                  | 3.00              | 1.00 | 1.75 |
| 5/8 x 4                                  | 3,440                         | .78                           | 20                  | 2.00              | 1.25 | 2.25 |